



Cable and jumper Product Carbon Footprint Verification Report

Client: Zhongtian Radio Frequency Cable Co., Ltd

Verification Body: TÜV SÜD Certification and Testing (China)
Co., Ltd.


Report ID: 64.500.24.01352.01

Date of Issue: 2024-03-28




Abstract of product carbon footprint verification

Name of the client	Zhongtian Radio Frequency Cable Co., Ltd		
Name of responsible party	Zhongtian Radio Frequency Cable Co., Ltd		
Address of responsible party	No 105 Qixin Road Economic & Technological Development Zone 226010 NanTong, Jiangsu Province		
Actual production address	No 105 Qixin Road Economic & Technological Development Zone 226010 NanTong, Jiangsu Province		
Name of the verified product	Cable Jumper		
Verified product series	Product category	Product model	
	Cable	HCAAY-50-12	
		HCAAYZ-50-12	
		HRCAYZ-50-9	
		HRCAY-50-9	
		HCTAYZ-50-23	
		HCTAY-50-22	
		HCTAY-50-32	
		HHTAY-50-42	
		HLRWUCYZ-50-22T	
		HLRHTCYZ-50-32T	
	Jumper	4310M-4310M-9*2	
		4310M-4310M-9*15	
		NM-NM-9*2	
		4310M-4310MA-9*5	
		4310M-DM-9*3	
		4310M-NM-9*3	
		4310M-DMA-9*3	
		DM-DMA-9*3	
		NM-NM-12*3	
		DM-DM-12*2	
Time period	Product category	Product model	Time period
	Cable	HCAAY-50-12	2023-01-01~2023-12-31
		HCAAYZ-50-12	2023-01-01~2023-12-31
		HRCAYZ-50-9	2023-01-01~2023-12-31
		HRCAY-50-9	2023-01-01~2023-12-31



HCTAYZ-50-23	2023-11-01~2023-11-30
HCTAY-50-22	2023-07-01~2023-12-31
HCTAY-50-32	2023-12-01~2023-12-31
HHTAY-50-42	2023-12-01~2023-12-31

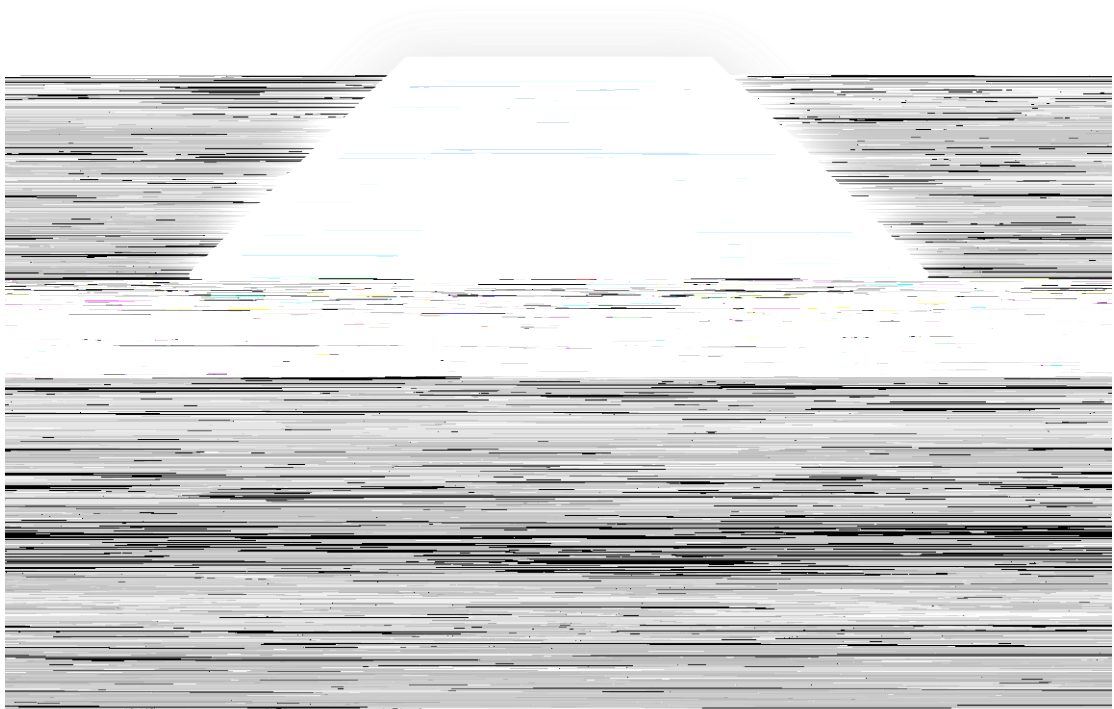



footprint claim			(kgCO ₂ eq/km)
	Cable	HCAAY-50-12	2.40E+03
		HCAAYZ-50-12	2.41E+03
		HRCAYZ-50-9	1.79E+03
		HRCAY-50-9	1.77E+03
		HCTAYZ-50-23	2.72E+03
		HCTAY-50-22	2.71E+03
		HCTAY-50-32	4.80E+03
		HHTAY-50-42	5.81E+03
		HLRWUCYZ-50-22T	1.62E+03
		HLRHTCYZ-50-32T	2.87E+03
	Jumper	4310M-4310M-9*2	1.88E+03
		4310M-4310M-9*15	1.50E+03
		NM-NM-9*2	1.74E+03
		4310M-4310MA-9*5	1.62E+03
		4310M-DM-9*3	1.72E+03
		4310M-NM-9*3	1.68E+03
		4310M-DMA-9*3	1.77E+03
		DM-DMA-9*3	1.82E+03
		NM-NM-12*3	2.13E+03
		DM-DM-12*2	2.61E+03
Product carbon footprint statement		Product category	Product model
			Carbon emission (kgCO₂eq/km)
			HCAAY-50-12
			HCAAYZ-50-12
	Cable		HRCAYZ-50-9
			HRCAY-50-9
			HCTAYZ-50-23
			HCTAY-50-22
			HCTAY-50-32
			HHTAY-50-42
			HLRWUCYZ-50-22T
			HLRHTCYZ-50-32T
	Jumper		4310M-4310M-9*2
			4310M-4310M-9*15
			NM-NM-9*2
			4310M-4310MA-9*5
			4310M-DM-9*3



		4310M-NM-9*3	1.68E+03
		4310M-DMA-9*3	1.77E+03
		DM-DMA-9*3	1.82E+03
		NM-NM-12*3	2.13E+03
		DM-DM-12*2	2.61E+03
Analysis of the difference between product carbon footprint claim and statement	The product carbon footprint statement is consistent with the product carbon footprint claim.		
Category and name of field of specialization	B14 Power distribution and control equipment and its parts; insulated wires and cables; fiber optic cables		
Materiality	Less than 5% of total carbon emissions in the system boundary		
Level of assurance	<input checked="" type="checkbox"/> Reasonable assurance level <input type="checkbox"/> Limited assurance level		
Date of document review	2024-02-07		
Date of on-site verification	2024-02-16		
Verification team leader	Kerry Yan		
Verification team member			
Other personnel (observers, interns/trainees, external auditors, etc.)	Tony Sun ; Abby Qin		
	Solomon J. Zhou ; Aryn Yang		
	Seph Lin ; Fiona Wang		
Address of the verification body	TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch 5F, Communication Building, 163 Pingyun Rd, Huangpu Ave. West, Guangzhou 510656 P.R. China		

Statement of responsibility

1) The responsible party is responsible for the compliance of the Product Carbon Footprint claim with




the ISO 14067:2018 standard, and the Responsible Party is responsible for the preparation and fair presentation of the Product Carbon Footprint Report in accordance with the standard;

2) The verifier is responsible for issuing a verification statement based on the verification of the product's carbon footprint claim, and the verification process and results are in accordance with ISO 14064-3:2019;

3) The procedure for collecting verification evidence for the assessment of GHG declarations is: CCB_GHG_P_09ECS Procedures for the Implementation of the Greenhouse Gas Validation and Verification Process.

Verification conclusion:


The product carbon footprint verification statement is based on ISO 14064-3:2019 to verify the claim of the responsible party that "The cradle-to-gate carbon footprint associated with cable model HCAAY-50-12 (10 models in total, see product series) and jumper model 4310M-4310M-9*2 (10 models in total, see product series) produced by the responsible party within the manufacturing geographical boundary and time boundary is 2.40E+03 kgCO₂eq/kg (for the remaining 9 cable model, see product carbon footprint claim) and 1.88E+03 kgCO₂eq/kg (for the remaining 9 jumper model, see product carbon footprint claim)". It was verified regarding compliance with the requirements of ISO 14067:2018. The product carbon footprint claim is consistent with the product carbon footprint verification statement.

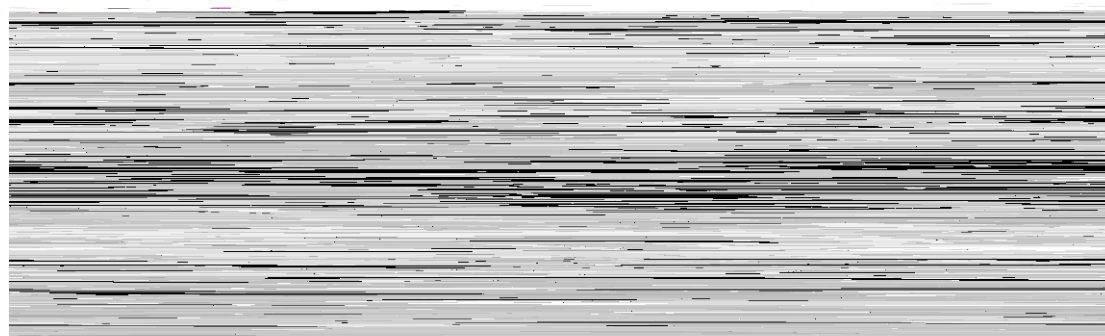



Contents

1	General description of verification	11
1.1	Verification purposes	11
1.2	Verification criteria	11
1.3	Verification evidence-gathering procedures.....	12
1.4	Statement of responsibility	12
1.5	General information of responsible party and verified product	13
2	Scope of verification	19
2.1	Scope of greenhouse gases	19
2.2	Time period and location of verification data	19
2.3	Declared unit	21
2.4	System boundary	21
2.5	Cut-off principles	22
2.6	Allocation principles.....	23
2.7	Software and Database	01 49.94 4401 1 Tm0g



Contents of Tables


Table 1-1 Weight and yield information	15
Table 2-1 Time period of each product model	20
Table 2-2 Allocators, principles, and properties of activity data of cable	23
Table 2-3 Allocators, principles, and properties of activity data of jumper	24
Table 3-1 PCF data sources	25
Table 3-2 Important unit processes and activity data of cable model HCAAYZ-50-12	26
Table 3-3 Important unit processes and activity data of jumper model 4310M-DM-9*3	27
Table 4-1 Product carbon footprint information of cable and jumper	28
Table 4-2 Values and ratios of PCF of cable at different life cycle stages	29
Table 4-3 Values and ratios of PCF of jumper at different life cycle stages	31
Table 4-4 Cable model HCAAYZ-50-12 Product Carbon Footprint Contribution of Unit Processes (above 1%)	32
Table 4-5 Jumper model 4310M-DM-9*3 Product Carbon Footprint Contribution of Unit Processes (above 1%)	33
Table 4-6 Monte Carlo analysis table of product carbon footprint verification results of cable HCAAYZ-50-12	34
Table 4-7 Monte Carlo analysis table of product carbon footprint verification results of jumper 4310M-DM-9*3	34
Table 4-8 Cable HCAAYZ-50-12 carbon footprint DQR sheet	35
Table 4-9 Jumper 4310M-DM-9*3 carbon footprint DQR sheet	36



Contents of Figures

Figure 1-1 Appearance of products of cable (from top to bottom and from left to right:

HRCAY-50-9, HRCAYZ-50-9, HCAAY-

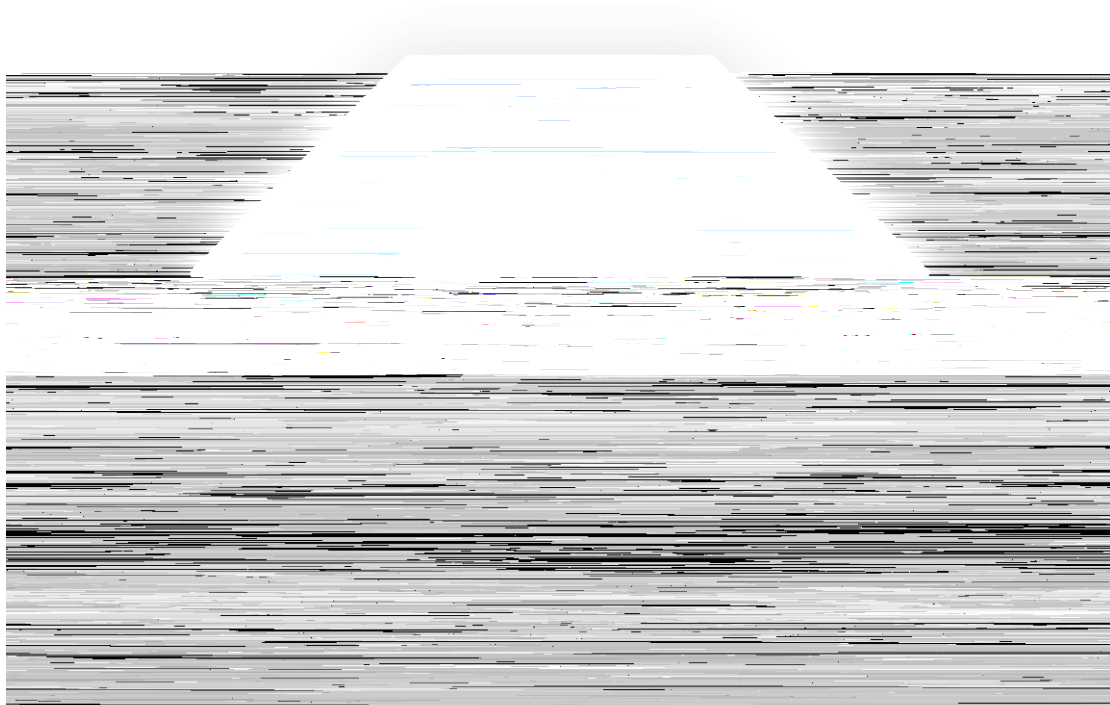



Abbreviations

PCR	Product Category Rule
IPCC	The Intergovernmental Panel on Climate Change
GWP	Global Warming Potentials
LCA	Life Cycle Assessment
GLO	Global average
RoW	Rest of World
tkm	tonne kilometre (unit for transportation services)
PTFE	Polytetrafluorethylene
CN	China
HDPE	High-density polyethylene
LDPE	Low-density polyethylene
PE	Polyethylene
LSZH	Low smoke zero halogen
EVA	Ethyl vinyl acetate
POE	Polyolefin elastomer
ECGC	East China grid
JS	Jiangsu
DQR	Data Quality Rating
CV	Control Value



1 General description of verification

1.1 Verification purposes

TÜV SÜD Certification and Testing (China) Co., Ltd. (hereinafter referred to as TÜV SÜD) was commissioned by Zhongtian Radio Frequency Cable Co., Ltd to carry out product carbon footprint verification on cable and jumper of Zhongtian Radio Frequency Cable Co., Ltd (hereinafter referred to as the responsible party).

The purposes of this verification include: 1) to confirm the correctness and conformity of the claim from the responsible party according to verification criteria; 2) to provide an independent evaluation of relevant information through objective evidence, including: whether the information in the GHG report meets the principles of relevance, completeness, consistency, accuracy and transparency; whether there are material errors and omissions in the reported data results; and whether the level of assurance provided is met.

1.2 Verification criteria

This verification was mainly conducted based on *ISO 14067:2018 Greenhouse gases . Carbon footprint of products . Requirements and guidelines for quantification* and *ISO 14064-3:2019 Greenhouse gases . Part 3: Specification with guidance for the verification and validation of greenhouse gas statements*. The verification also referred to parts of the *Suggestions for Updating the Product Environmental Footprint Methodology* (hereinafter referred to as PEF) and the *Product Environmental Footprint Category Rules Guidance* (version 6.3, hereinafter referred to as PEFCR Guidelines). As of this verification, *EN 15804:2012+A2:2019 Sustainability of construction works . Environmental product declarations . Core rules for the product category of construction products* was being referred. Other relevant standards and literature that also referred to are listed in the *References* section of this verification report.



1.3 Verification evidence-gathering procedures


TÜV SÜD conducted document review and on-site verification of the responsible party on 2024-02-07 and 2024-02-16 respectively. The objects and contents include basic information of the enterprise, inventory of emission facilities, inventory of emission sources, inventory of monitoring equipment, information related to activity level and emission factors, etc. Through the strategic analysis of verification activities and risk assessment to identify the risks of verification activities in advance, a reasonable evidence-gathering plan was developed for:


- 1) Accounting boundaries, emission facilities and emission sources identification of the responsible party, etc.
- 2) Information management for the acquisition, recording, transmission and aggregation of activity level data and parameters related to emissions within the system boundary of responsible party.
- 3) Accounting methods and emission data calculation process.
- 4) Calibration and maintenance of measuring instruments and monitoring equipment.
- 5) Verification of quality assurance and documentation archiving.

The responsible party provided relevant supporting materials and evidentiary materials according to the evidence-gathering plan formulated by the verification team. Verification activity performed 100% of collection for data sources and all sampling for data source for cross check.

1.4 Statement of responsibility

- 1) The responsible party is responsible for the compliance of the Product Carbon Footprint claim with the ISO 14067:2018 standard, and the Responsible Party is

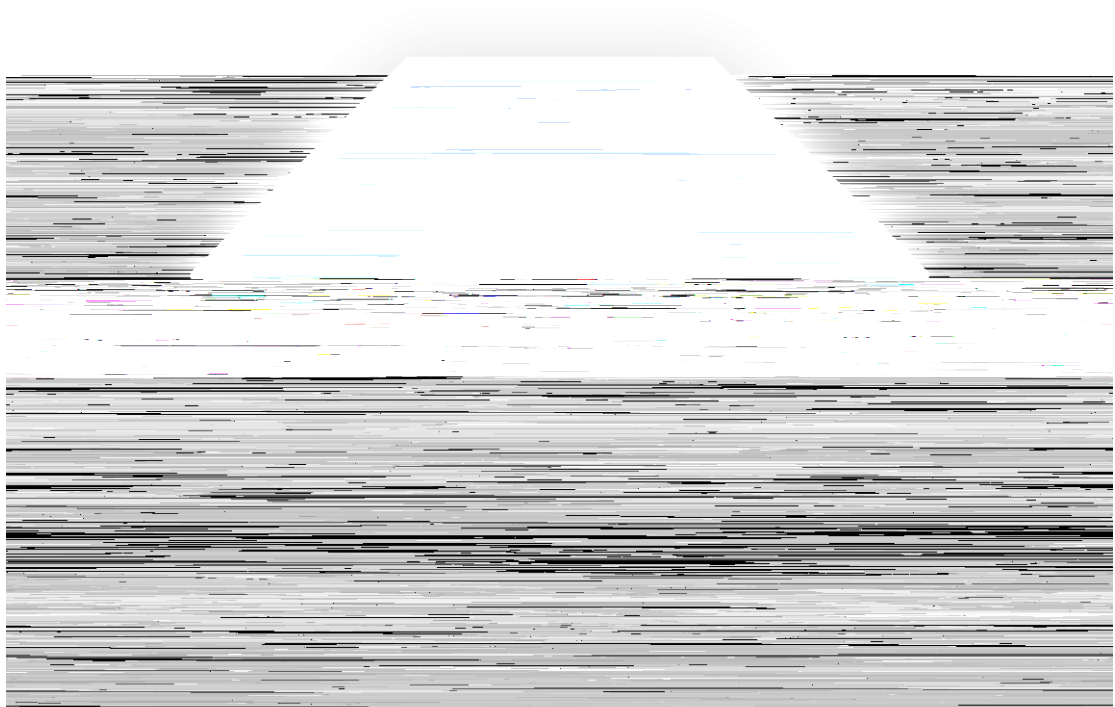



adopting domestic advanced CNC machine tools to produce a variety of supporting accessories products. The company has set up the most modern and complete CNAS-certified communication product testing center and combustion laboratory to monitor the stability and reliability of product quality, as well as cable flame retardant, fire-resistant and other safety performance test

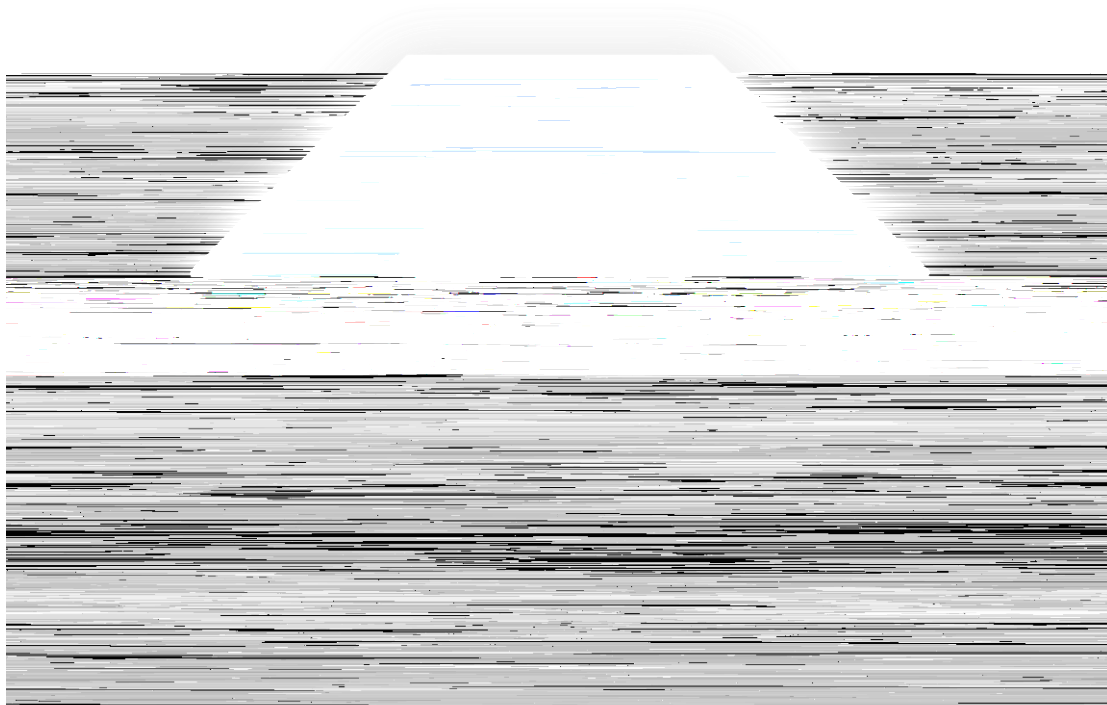




Table 1-1 Weight and yield information

Product Category	Product model	Product information	Yield within the time boundary
Cable	HCAAY-50-12	2.26E+02 kg/km	2.03E+03 km
	HCAAYZ-50-12	2.44E+02 kg/km	5.32E+04 km
	HRCAYZ-50-9	1.86E+02 kg/km	1.21E+03 km
	HRCAY-50-9	1.71E+02 kg/km	3.51E+03 km
	HCTAYZ-50-23	5.91E+02 kg/km	5.40E+00 km
	HCTAY-50-22	5.22E+02 kg/km	2.32E+02 km
	HCTAY-50-32	1.11E+03 kg/km	2.50E+00 km
	HHTAY-50-42	1.64E+03 kg/km	8.73E+00 km
	HLRWUCYZ-50-22T	3.77E+02 kg/km	1.86E+02 km
	HLRHTCYZ-50-32T	1.05E+03 kg/km	2.34E+03 km

Jumper 10

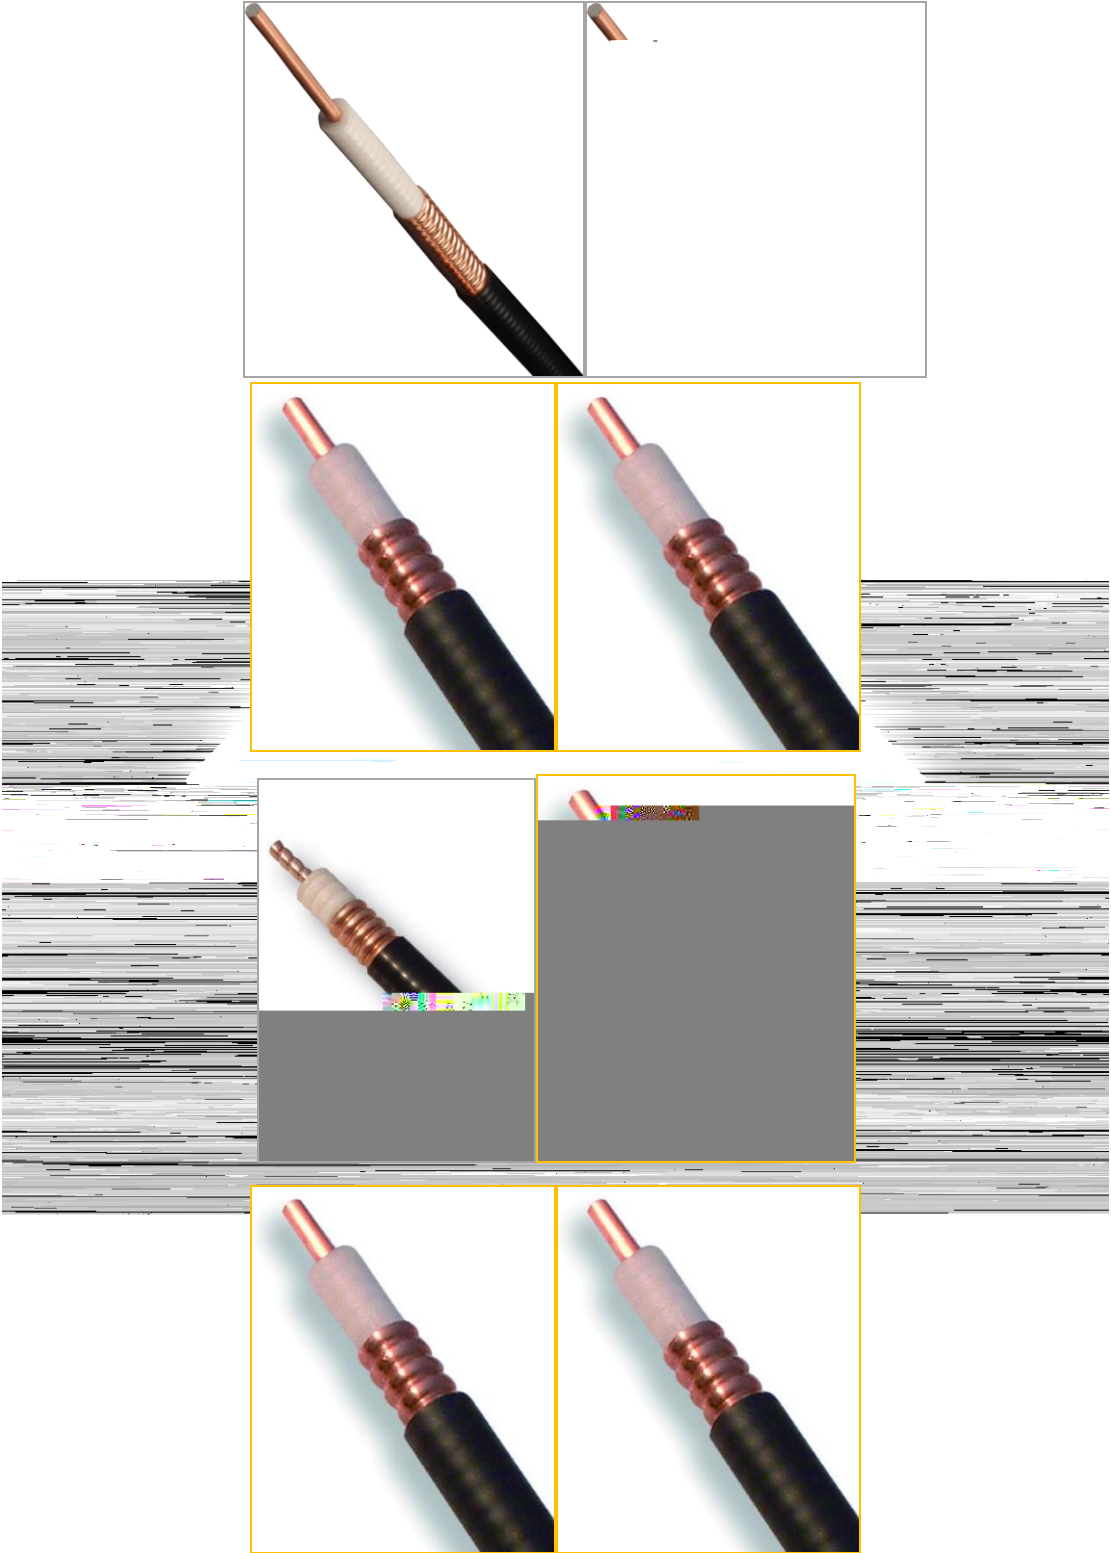




Figure 1-1 Appearance of products of cable (from top to bottom and from left to right:
HRCAY-50-9, HRCAYZ-50-9, HCAAY-50-12, HCAAYZ-50-12, HHTAY-50-42,
HCTAY-50-32, HCTAYZ-50-23, HCTAY-50-22, HLRWUCYZ-50-22T,
HLRHTCYZ-50-32T)






Figure 1-2 Appearance of products of jumper (from top to bottom and from left to right:
4310M-4310M-9*2, 4310M-4310M-9*15, NM-NM-9*2, 4310M-4310MA-9*5,
4310M-DM-9*3, 4310M-NM-9*3, 4310M-DMA-9*3, DM-DMA-9*3, NM-NM-12*3,
DM-DM-12*2)

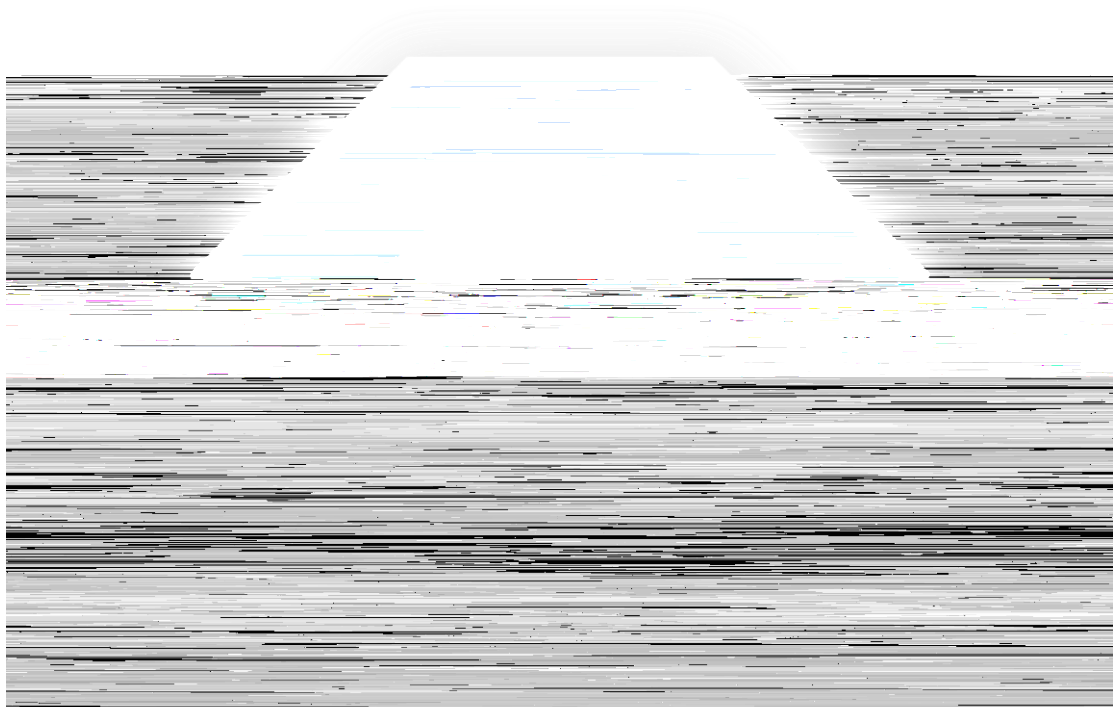




Table 2-1 Time period of each product model

Product Category	Product model	Time period
Cable	HCAAY-50-12	2023-01-01~2023-12-31
	HCAAYZ-50-12	2023-01-01~2023-12-31
	HRCAYZ-50-9	2023-01-01~2023-12-31
	HRCAY-50-9	2023-01-01~2023-12-31
	HCTAYZ-50-23	2023-11-01~2023-11-30
	HCTAY-50-22	2023-07-01~2023-12-31
	HCTAY-50-32	2023-12-01~2023-12-31
	HHTAY-50-42	2023-12-01~2023-12-31
	HLRWUCYZ-50-22T	2023-06-01~2023-12-31
	HLRHTCYZ-50-32T	2023-01-01~2023-12-31
	4310M-4310M-9*2	2023-08-01~2023-08-31
	4310M-4310M-9*15	2023-01-01~2023-03-31
	NM-NM-9*2	2023-01-01~2023-03-31
Jumper	4310M-4310MA-9*5	2023-02-01~2023-02-28
	4310M-DM-02	



Figure 2-1 The production geographical boundary of the product

2.3 Declared unit

The declared units of the product carbon footprint use SI units. The declared units of the product carbon footprint of the cable are 1 kilometer of cable. The declared units of the product carbon footprint of the jumper are 1 kilometer of jumper (the length is calculated by the length of its inner feeder).

2.4 System boundary

System boundary in this verification is cradle-to-gate, i.e., from the acquisition of raw materials stage to manufacturing stage, including 1 life cycle stages: A1-A3 – Product. A4-A5 – Construction process, B – Use, C – End of life and D – Benefits and loads beyond the system boundary are excluded from the system boundary of LCA for equipment products. The process flow of system boundary of product's life cycle is shown in Figure 2-2 and Figure 2-3.



Figure 2-2 Cable process flow chart of product's system boundary

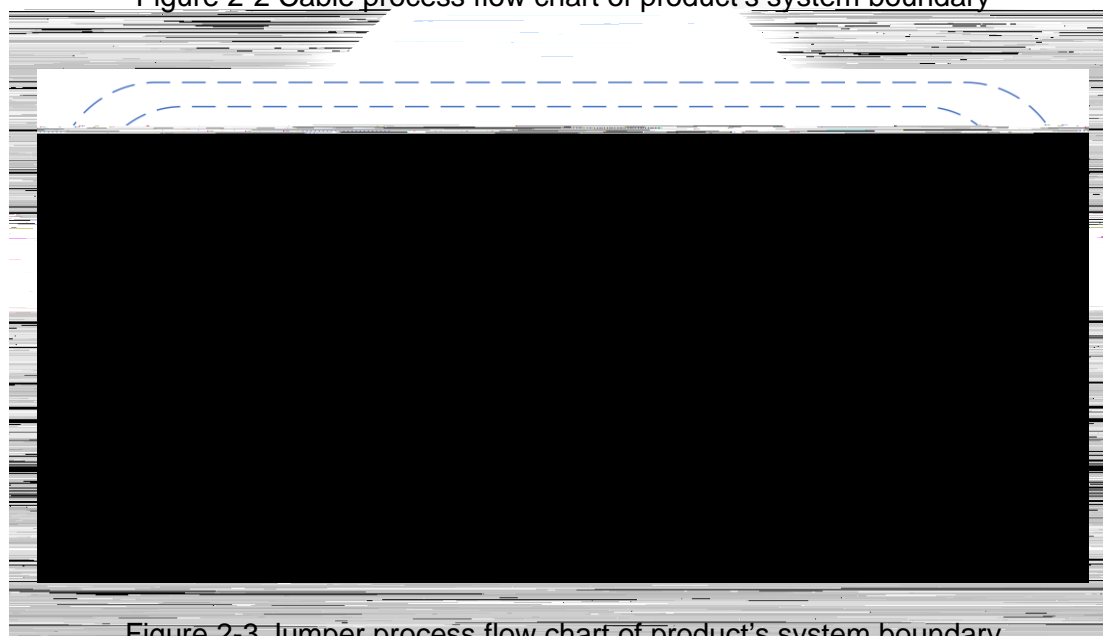


Figure 2-3 Jumper process flow chart of product's system boundary

2.5 Cut-off principles

According to ISO 14067:2018 and other verification standards (see *References* section), the complete scope of data for this verification has covered raw materials, production auxiliary materials, packaging materials, transportation of raw materials and auxiliary materials, manufacturing energy and resource consumption and waste emissions and disposals of manufacturing process.

The input mass ratio of products within system boundaries in this report is 99.00%. Energy and resource consumption in the production stage and production



waste discharge and disposal were all taken into account. In addition, the consumption and emissions of roads and plants' infrastructure, equipment of each process, personnel and living facilities in the plants were ignored.

2.6 Allocation principles

The activity data collected by the responsible party is allocated according to the allocation procedures, principles, and properties in Table 2-2 and Table 2-3.

Table 2-2 Allocators, principles, and properties of activity data of cable

Process	Procedure	Principle	Property
Raw materials	Avoid allocation	\	\
Packaging materials	Avoid allocation	\	\
Manufacturing energy and resource consumption	Allocation between co-products	Physical allocation	Yield of factory (Total km of cable)
Manufacturing emissions and waste	Allocation between co-products	Physical allocation	Yield of factory (Total km of cable)
Transportation	Avoid allocation	\	\
Processes involving recovery	Allocation for recovery operations	Cut-off Model	\

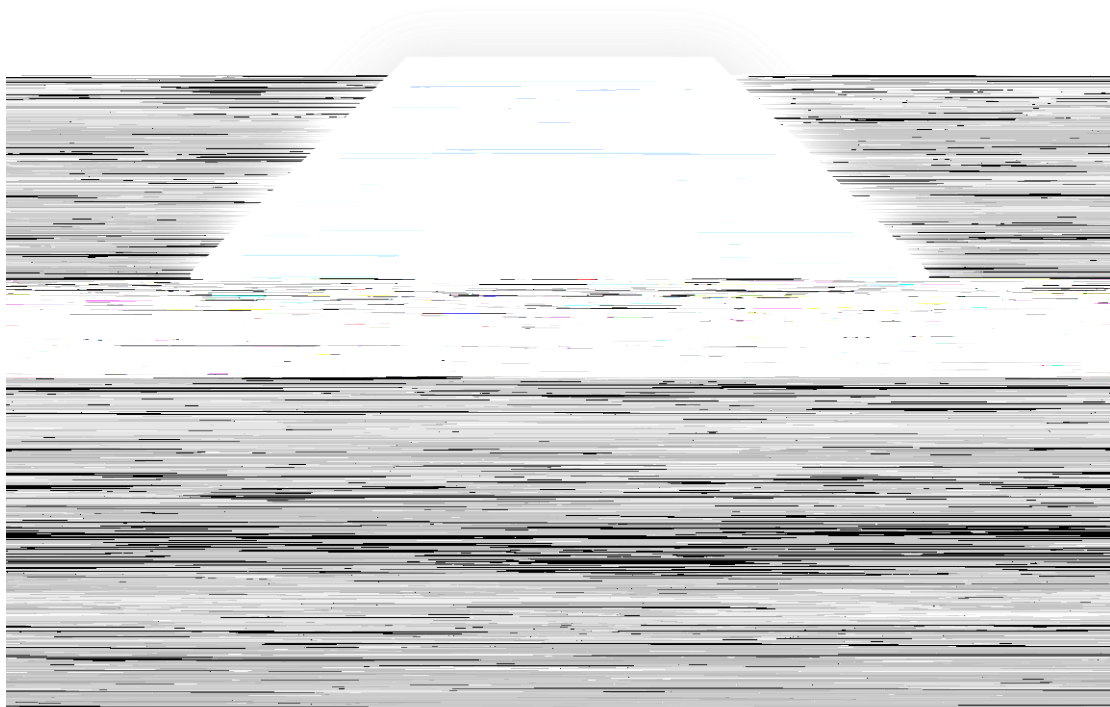




Table 3-1 PCF data sources

Data category	Data source	
Activities (primary) data	Data at raw material supply	BOM sheets
	Data at manufacturing	Electricity meters; notice of electricity and tap water bills; environmental impact assessment report; exhaust gas test report; hazardous waste inventory; waste transfer joint order
	Yield data of product	Monthly production reports; warehouse orders
	Transportation data	Transportation mode of raw materials and product; transportation distance of road
Background (secondary) data	Data at raw material supply	Ecoinvent 3.9.1 database (see Annex A)
	Data at manufacturing	Ecoinvent 3.9.1 database (see Annex A)
	Transportation data	Ecoinvent 3.9.1 database (see Annex A)

3.2 Assumptions

This verification does not involve scenario assumptions.

3.3 Activity data

All unit processes and corresponding activity data for each declared unit of product at each life cycle stage are identified by verifying the responsible party's evidence documentation, of which the unit processes contribution that are either 5% or more in its module or more than 1% in the product carbon footprint verification of cable model HCAAYZ-50-12 (as an example) are listed in Table 3-2 and of jumper model 4310M-DM-9*3 (as an example) are listed in Table 3-3. The complete list of all unit processes is shown in Annex A.



Table 3-2 Important unit processes and activity data of cable model HCAAYZ-50-12

Life cycle stage	Module	Unit process	Consumption/emission of product per
------------------	--------	--------------	-------------------------------------

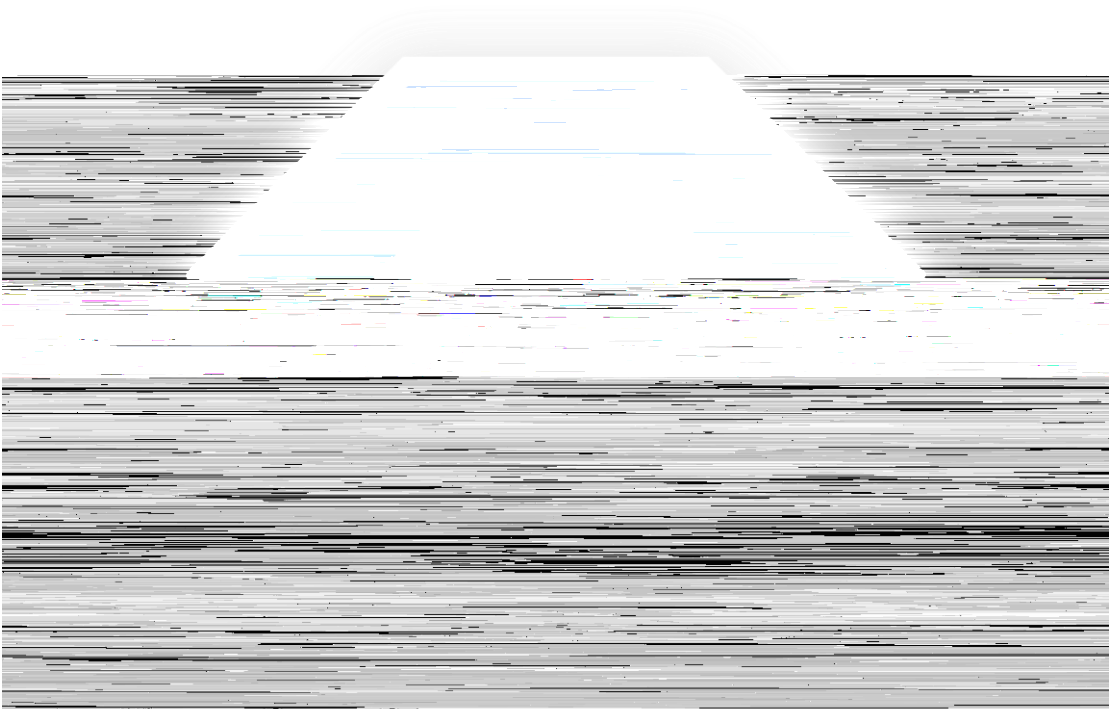




Table 3-3 Important unit processes and activity data of jumper model 4310M-DM-9*3

Life cycle stage	Module	Unit process	Consumption/emission of product per declared unit
A1-A3 - Product	A1- Raw material supply	Connector (brass)	1.78E+01 kg
		Connector (PTFE)	7.40E-01 kg
		1/2" Super flexible feeder	8.23E-01 km
		Solder wire	6.33E-01 kg
	A2 - Transport	Connector transport	3.70E+00 tkm
		Injection molding material transport	2.61E-01 tkm
	A3 - Manufacturing	Tap water	1.40E+03 kg
		Electricity - grid	2.32E+01 kWh
		Hazardous waste - saponified oil	1.14E+00 kg

3.4 Activity data

The secondary data reference sources for each unit process are shown in Annex A.

4 Product carbon footprint verification results and analysis

4.1 Product Carbon Footprint Verification Results

According to the verified carbon footprint data list of products, the carbon footprint of declared units within the life cycle system boundary of the products under verification is verified (Table 4-1), as well as the amount and proportion of carbon footprint at each stage of the life cycle (Table 4-2 and Table 4-3).



Table 4-1 Product carbon footprint information of cable and jumper

Product category	Product Model	Carbon footprint per declared unit (kgCO ₂ eq/km)
Cable	HCAAY-50-12	2.40E+03
	HCAAYZ-50-12	2.41E+03
	HRCAYZ-50-9	1.79E+03
	HRCAY-50-9	1.77E+03
	HCTAYZ-50-23	2.72E+03
	HCTAY-50-22	2.71E+03
	HCTAY-50-32	4.80E+03
	HHTAY-50-42	5.81E+03
	HLRWUCYZ-50-22T	1.62E+03
	HLRHTCYZ-50-32T	2.87E+03
Jumper	4310M-4310M-9*2	1.88E+03
	4310M-4310M-9*15	1.50E+03
	NM-NM-9*2	1.74E+03
	4310M-4310MA-9*5	1.62E+03
	4310M-DM-9*3	1.72E+03
	4310M-NM-9*3	1.68E+03
	4310M-DMA-9*3	1.77E+03
	DM-DMA-9*3	1.82E+03
	NM-NM-12*3	2.13E+03
	DM-DM-12*2	2.61E+03



Table 4-2 Values and ratios of PCF of cable at different life cycle stages

Product model	Life cycle stage	Module	Carbon footprint per declared unit (kgCO ₂ eq/km)	Ratio (%)
HCAAY-50-12	A1-A3-Product	A1-Raw material supply	2.00E+03	83.45
		A2-Transport	6.15E+00	0.26
		A3-Manufacturing	3.90E+02	16.30
HCAAYZ-50-12	A1-A3-Product	A1-Raw material supply	2.01E+03	83.53
		A2-Transport	5.95E+00	0.25
		A3-Manufacturing	3.90E+02	16.22
HRCAYZ-50-9	A1-A3-Product	A1-Raw material supply	1.39E+03	77.92
		A2-Transport	3.74E+00	0.21
		A3-Manufacturing	3.90E+02	21.87
HRCAY-50-9	A1-A3-Product	A1-Raw material supply	1.38E+03	77.74
		A2-Transport	3.72E+00	0.21
		A3-Manufacturing	3.90E+02	22.05
HCTAYZ-50-23	A1-A3-Product	A1-Raw material supply	2.29E+03	84.15
		A2-Transport	8.35E+00	0.31
		A3-Manufacturing	4.22E+02	15.54
HCTAY-50-22	A1-A3-Product	A1-Raw material supply	2.31E+03	85.48
		A2-Transport	7.14E+00	0.26
		A3-Manufacturing	3.86E+02	14.26
HCTAY-50-32	A1-A3-Product	A1-Raw material supply	4.39E+03	91.60
		A2-Transport	1.29E+01	0.27
		A3-Manufacturing	3.90E+02	8.13
HHTAY-50-42	A1-A3-Product	A1-Raw material supply	5.40E+03	92.97
		A2-Transport	1.81E+01	0.31
		A3-Manufacturing	3.90E+02	6.72
		A1-Raw material supply	1.23E+03	75.90

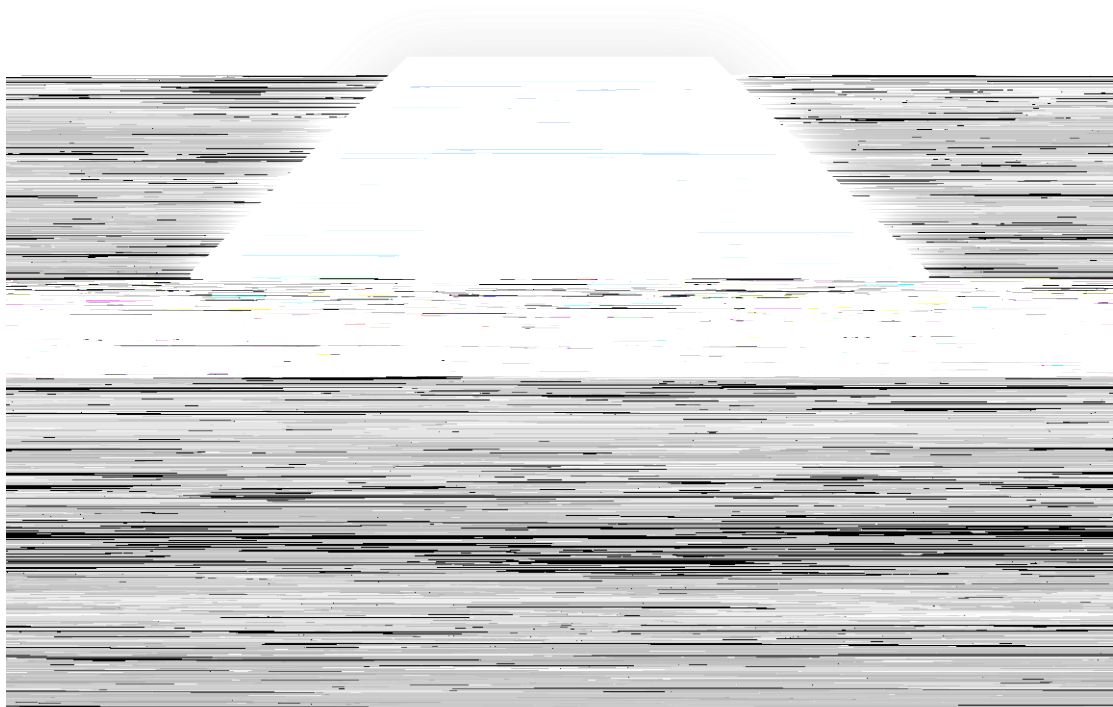




Table 4-3 Values and ratios of PCF of jumper at different life cycle stages

Product model	Life cycle stage	Module	Carbon footprint per declared unit (kgCO ₂ eq/km)	Ratio (%)
4310M-4310M-9*2	A1-A3-Product	A1-Raw material supply	1.76E+03	94.04
		A2-Transport	1.38E+00	0.07
		A3-Manufacturing	1.10E+02	5.88
4310M-4310M-9*15	A1-A3-Product	A1-Raw material supply	1.50E+03	99.55
		A2-Transport	2.07E-01	0.01
		A3-Manufacturing	6.62E+00	0.44
NM-NM-9*2	A1-A3-Product	A1-Raw material supply	1.69E+03	97.10
		A2-Transport	1.04E+00	0.06
		A3-Manufacturing	4.96E+01	2.85
4310M-4310MA-9*5	A1-A3-Product	A1-Raw material supply	1.60E+03	98.92
		A2-Transport	6.77E-01	0.04
		A3-Manufacturing	1.68E+01	1.04
4310M-DMA-9*3	A1-A3-Product	A1-Raw material supply	1.69E+03	98.14
		A2-Transport	1.08E+00	0.06
		A3-Manufacturing	3.11E+01	1.80
4310M-NM-9*3	A1-A3-Product	A1-Raw material supply	1.64E+03	97.59
		A2-Transport	8.18E-01	0.05
		A3-Manufacturing	3.97E+01	2.36

A1-Raw

4310M-DMA-9*3 A1-A3-Product



		A3-Manufacturing	8.40E+01	3.22
--	--	------------------	----------	------

4.2 Contribution of each life cycle stage

Taking cable model HCAAYZ-50-12 and jumper model 4310M-DM-9*3 as examples, the unit processes and contribution amount that contributed more than 1% in the product carbon footp

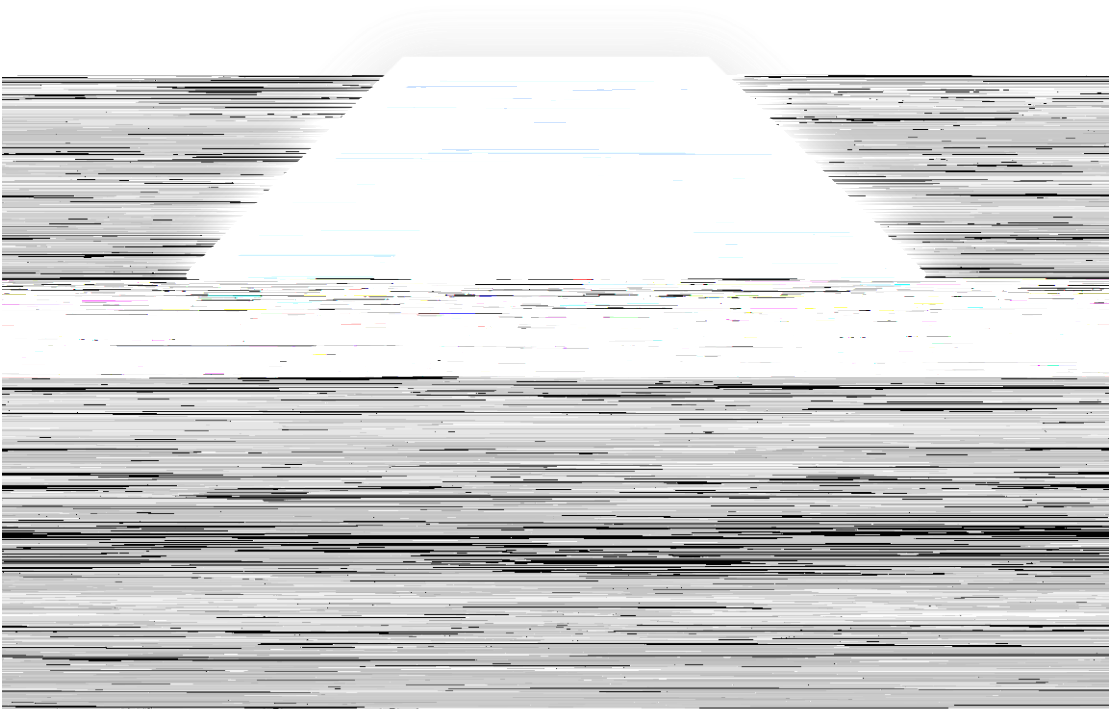




Table 4-5 Jumper model 4310M-DM-9*3 Product Carbon Footprint Contribution of Unit Processes (above 1%)

Life cycle stage	Module	Unit process	Carbon footprint per declared unit (kgCO ₂ eq/km)	Ratio (%)
A1-A3 - Product	A1-Raw material supply	Connector (brass)	1.01E+02	5.87
		Connector (PTFE)	1.21E+02	7.00
		1/2" Super flexible feeder	1.45E+03	84.15
		Solder wire	1.78E+01	1.03
	A3-Manufacturing	Electricity - grid	2.05E+01	1.19

4.3 Completeness and Consistency verification

The carbon footprint verification procedure for the verified product was based on the actual production activities of the company. The inventory data of each stage within the system boundary were obtained from evidential document from the responsible party. The data were not checked to have omissions, and the cut-off and allocation principles have been explained and described to meet the completeness requirement of the standard.

In terms of consistency verification, the assumptions, methodologies and scope of data for the carbon footprint of the products under verification were consistent with the system boundary. Background (secondary) data selection of the database emission factor parameters was consistent with the production process of each raw material. The selection of transportation emission factors was consistent with the mode of transportation. The emission factor data of energy and resource was close to the geographical area where the factory is located, and the data closest to the year of verification was selected.



4.4 Unce





the methodology's requirement of selecting the top 80% of the unit processes contributing to the Pareto analysis, and can be representative of the product's DQR.

The ratings atings at6(of1 0 0 1 113.9 699.58 Tm0 g0 G[r]-3(atin)3(gs)-0 g0 G[])JTJETQq1141.92 reW


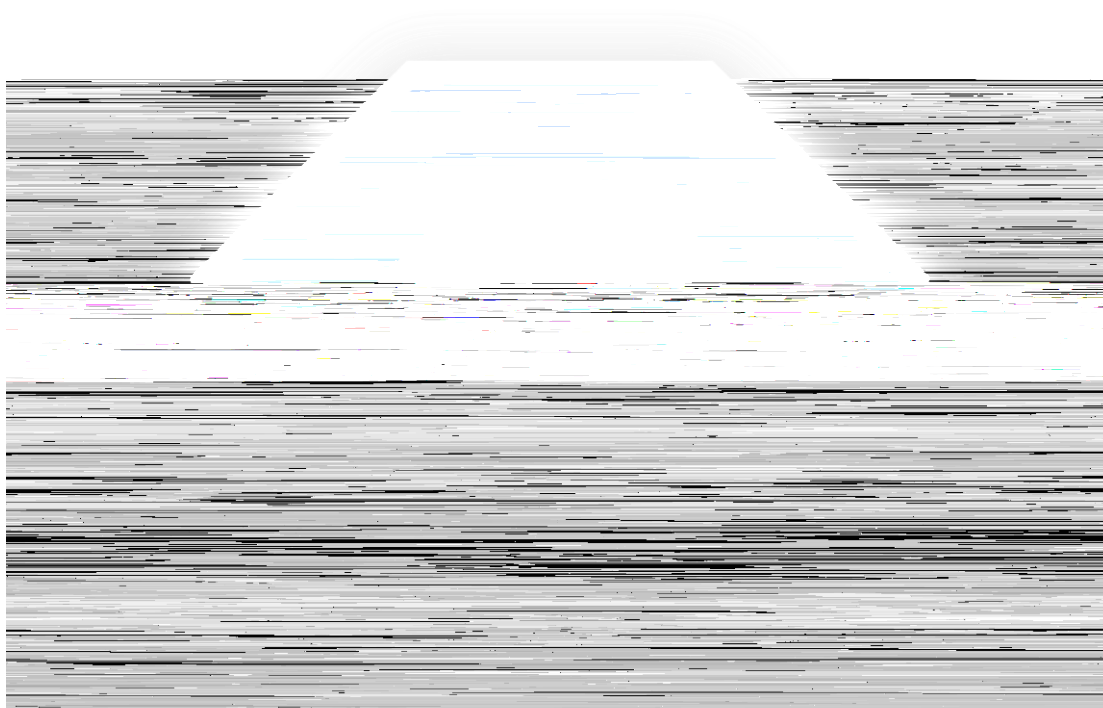




Table 4-9 Jumper 4310M-DM-9*3 carbon footprint DQR sheet

Life cycle stage	Module	Unit Process	C	M	Te _R	Ge _R	Ti _R	P	Weight
A1-A3 - Product	A1-Raw material supply	Connector (brass)			2	2	2	2	6.05%
		Connector (PTFE)			3	2	2	2	7.22%
		1/2" Super flexible feeder			1	1	2	2	86.73%
Total					1.20	1.13	2	2	100%
DQR				1.58		Level		Very good quality	



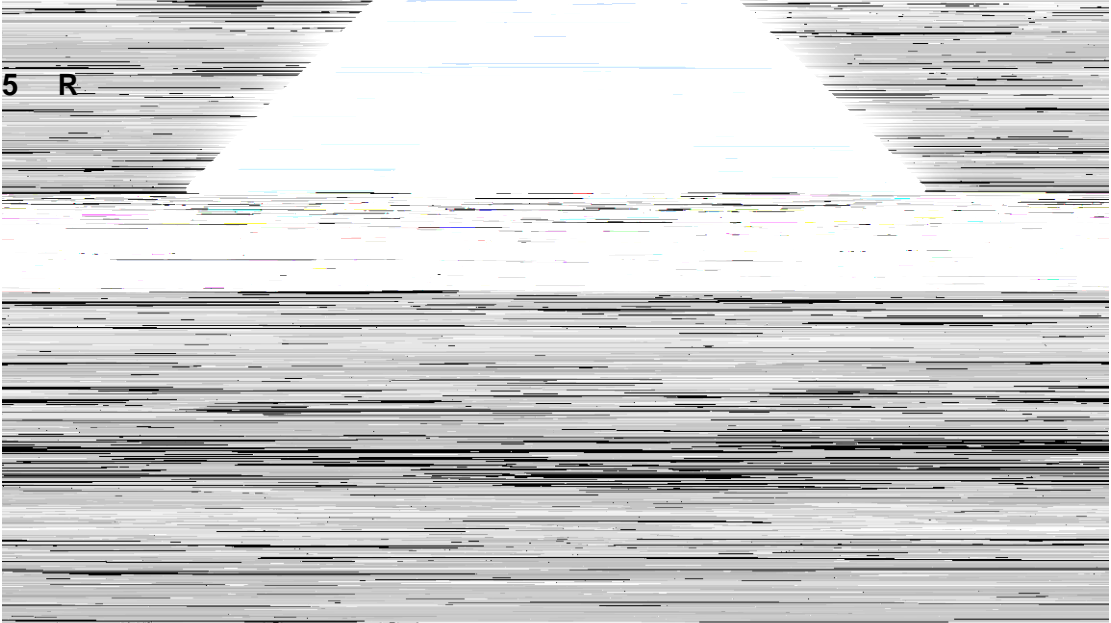

6 References

- 1) ISO 14067:2018 Carbon footprint of products —Requirements and guidelines for quantification and communication
- 2) ISO 14064-3:2019 Greenhouse gases —Part 3: Specification with guidance for the verification and validation of greenhouse gas statements
- 3) ISO 14040:2006 Environmental management — Life cycle assessment —Principles and Framework
- 4) ISO 14044:2006 Environmental management — Life cycle assessment — Principles and guidelines
- 5) PAS 2050:2008 Specification for the assessment of the life cycle greenhouse gas emissions of goods and services
- 6) GHG protocol Product Life Cycle Accounting and Reporting Standard
- 7) Zampori, L. and Pant, R., Suggestions for updating the Product Environmental Footprint (PEF) method, EUR 29682 EN, Publications Office of the European Union, Luxembourg, 2019, ISBN 978-92-76- 00654-1, doi:10.2760/424613, JRC115959.
- 8) Product Environmental Footprint Category Rules Guidance, Version 6.3, May 2018.
- 9) EN 15804:2012+A2:2019 Sustainability of construction works — Environmental product declarations — Core rules for the product category of construction products.



Annex A List of verified secondary data sources

Table A-1 List of verified secondary data sources of each unit process

A1-Raw material supply	
Raw material	Raw material
Connector (brass)	Brass {RoW} brass production Cut-off, U
Connector (PTFE)	Tetrafluoroethylene {RoW} tetrafluoroethylene production Cut-off, U
Injection molding material	Polyethylene, linear low density, granulate {RoW} polyethylene production, linear low density, granulate Cut-off, U
Dust cap	Packaging film, low density polyethylene {RoW} packaging film production, low density polyethylene Cut-off, U
Bubble bag	Packaging film, low density polyethylene {RoW} packaging film production, low density polyethylene Cut-off, U
Solder wire	Solder, bar, Sn95.5Ag3.9Cu0.6, for electronics industry {GLO} solder production, bar, Sn95.5Ag3.9Cu0.6, for electronics industry Cut-off, U
Corrugated cardboard	Corrugated board box {RoW} corrugated board box production Cut-off, U
Pallet	Sawnwood, board, softwood, raw, dried (u=20%) {RoW} board, softwood, raw, kiln drying to u=20% Cut-off, U
Copper-clad aluminum processing	Wire drawing, copper {RoW} wire drawing, copper Cut-off, U
Copper-clad aluminum (red copper)	Copper, cathode {GLO} market for copper, cathode Cut-off, U
Copper-clad aluminum (aluminum)	Aluminium, primary, ingot {CN} aluminium production, primary, ingot Cut-off, U
HDPE	Polyethylene, high density, granulate {RoW} polyethylene production, high density, granulate Cut-off, U
LDPE	Polyethylene, low density, granulate {RoW} polyethylene production, low density, granulate Cut-off, U
Nucleating agent	Polyethylene, linear low density, granulate {RoW} polyethylene production, linear low density, granulate Cut-off, U



	U
Copper strip	Copper, cathode {GLO} market for copper, cathode Cut-off, U
Copper strip processing	Sheet rolling, copper {RoW} sheet rolling, copper Cut-off, U
PE sheathing compound	Polyethylene, high density, granulate {RoW} polyethylene production, high density, granulate Cut-off, U
LSZH sheathing compound (EVA)	Ethylene vinyl acetate copolymer {RoW} ethylene vinyl acetate copolymer production Cut-off, U
LSZH sheathing compound (PE)	Polyethylene, high density, granulate {RoW} polyethylene production, high density, granulate Cut-off, U
LSZH sheathing compound (grafting material)	Maleic anhydride {RoW} maleic anhydride production by catalytic oxidation of benzene Cut-off, U
LSZH (aluminum hydroxide)	Aluminium hydroxide {CN} aluminium hydroxide production Cut-off, U
LSZH (POE)	N-olefins {RoW} n-olefins production Cut-off, U
LSZH (auxiliaries)	Tetraethyl orthosilicate {GLO} tetraethyl orthosilicate production Cut-off, U

Copper pipe	Copper, cathode {GLO} market for copper, cat0 0 1 385.75 388
-------------	---



panel	photovoltaic, 3kWp slanted-roof installation, multi-Si, panel, mounted Cut-off, U
Diesel	Diesel {RoW} market for diesel Cut-off, U
Water	Tap water {RoW} market for tap water Cut-off, U
Waste	
Waste water	Waste water
Hazardous waste	Hazardous waste, for incineration {RoW} treatment of hazardous waste, hazardous waste incineration Cut-off, U
Waste cable	Waste, electrical and electronic cables {RoW} treatment of waste, electrical and electronic cables, open burning Cut-off, U
Waste copper scrap	Scrap copper {RoW} treatment of scrap copper, municipal incineration Cut-off, U
Waste injection molding material	Waste polyethylene {RoW} treatment of waste polyethylene, municipal incineration Cut-off, U
Waste brass	Scrap copper {RoW} treatment of scrap copper, municipal incineration Cut-off, U
Waste connector	Scrap copper {RoW} treatment of scrap copper, municipal incineration Cut-off, U
Waste paperboard	Waste paperboard {GLO} treatment of waste paperboard, open burning Cut-off, U
Waste wood	Waste wood, untreated {RoW} treatment of waste wood, untreated, municipal incineration Cut-off, U
Waste plastic paper	Waste polyethylene {RoW} treatment of waste polyethylene, municipal incineration Cut-off, U
Waste foam materials	Waste polyethylene {RoW} treatment of waste polyethylene, municipal incineration Cut-off, U
Waste copper-clad aluminum (red copper)	Scrap copper {RoW} treatment of scrap copper, municipal incineration Cut-off, U
Waste copper-clad aluminum (aluminum)	Scrap aluminium {RoW} treatment of scrap aluminium, municipal incineration Cut-off, U
Waste copper pipe core wire	Scrap copper {RoW} treatment of scrap copper, municipal incineration Cut-off, U
Waste embossing process copper material	Scrap copper {RoW} treatment of scrap copper, municipal incineration Cut-off, U
Waste sheathing material	Waste polyethylene {RoW} treatment of waste polyethylene, municipal incineration Cut-off, U
Waste core wire (copper)	Scrap copper {RoW} treatment of scrap copper, municipal



	incineration Cut-off, U
Waste punch press copper strip	Scrap copper {RoW} treatment of scrap copper, municipal incineration Cut-off, U
Waste aluminum	Scrap aluminium {RoW} treatment of scrap aluminium, municipal incineration Cut-off, U

